



396-5784Y1

Universal Pump Mount Installation Instructions

Kit Number: 515-03-3000


Kit Description: Universal Pump Mounting Bracket Kit





Parts List and Exploded View


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	400-5600Y1	Reversible Pump Mounting Bracket - Bar Mount Weldment	1
2	400-5605Y1	Reversible Pump Mounting Bracket - Bent Mount Plate	2
3	330-06	3/8" Flat Washer	2
4	330-08	1/2" Flat Washer	4
5	300-060400-5	3/8" x 4" Hex Head Bolt - G5	2
6	300-080108-5	1/2" x 1-1/2" Hex Head Bolt - G5	4
7	323-06	3/8" Flange Nut	2
8	323-08	1/2" Flange Nut	4
9	380-XXXX	1/2" U-bolt Kit - Selected Based on Your Application	2

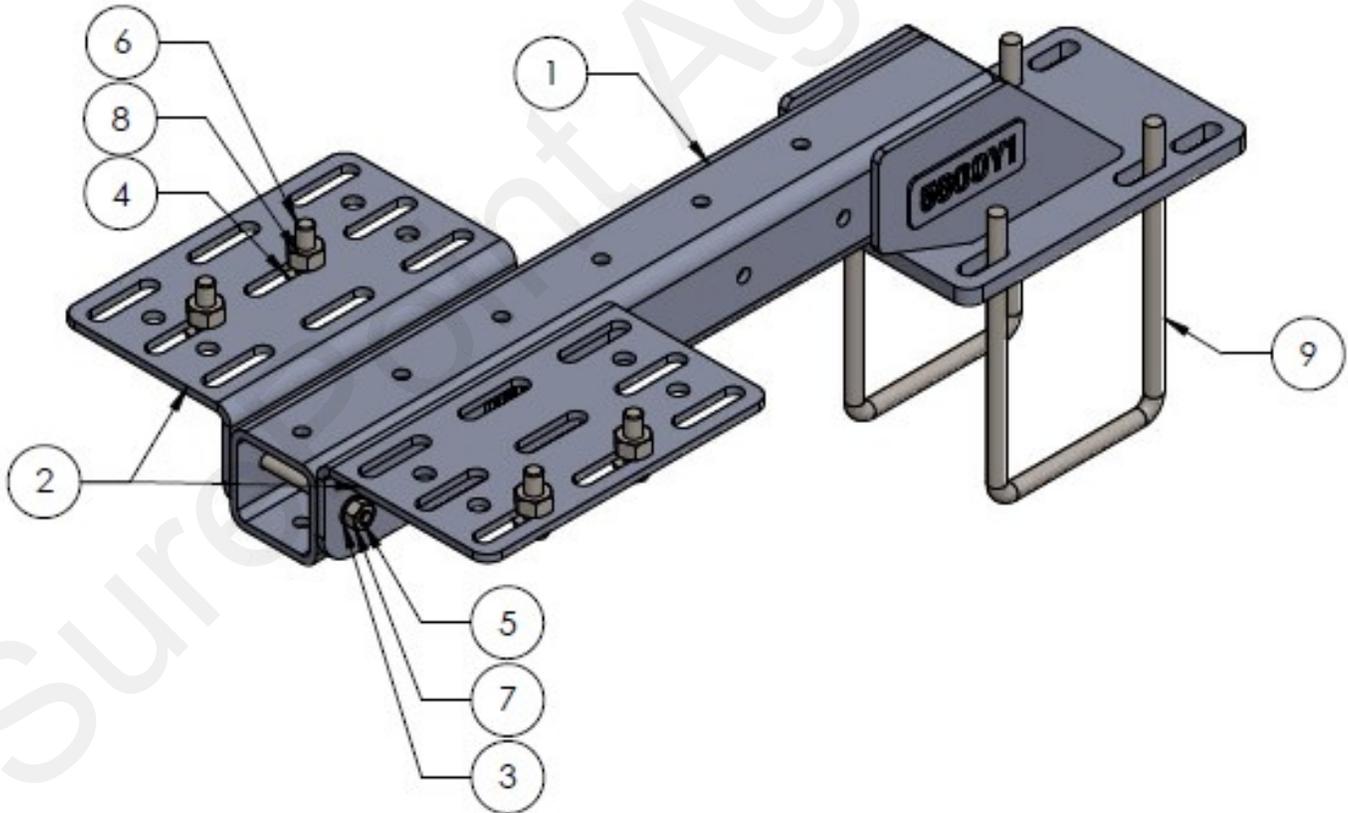



Step by Step Instructions




1. Mount the 5600Y1 bracket to the desired toolbar using the provided 1/2" U-Bolts. This bracket can be mounted above or below a horizontal toolbar, as well as on the side of a vertical bar. Mount the bracket based on your application
2. Bolt the 5605Y1 brackets to the 5600Y1 bracket using the provided 3/8" hardware. You can mount the 5605Y1 brackets in any of the mounting holes provided. Be sure to use 2 mounting holes so the bracket will have intended effect. Tighten 3/8" hardware to secure the brackets.
3. Mount the pump to the 5605Y1 brackets using the provided 1/2" hardware. The pump can be mounted in any configuration to fit your application.
4. Once pump is in place, be sure the pump is clear of any obstructions (row units, mechanical drive shafts, etc.) Tighten U-Bolts and 1/2" pump hardware.

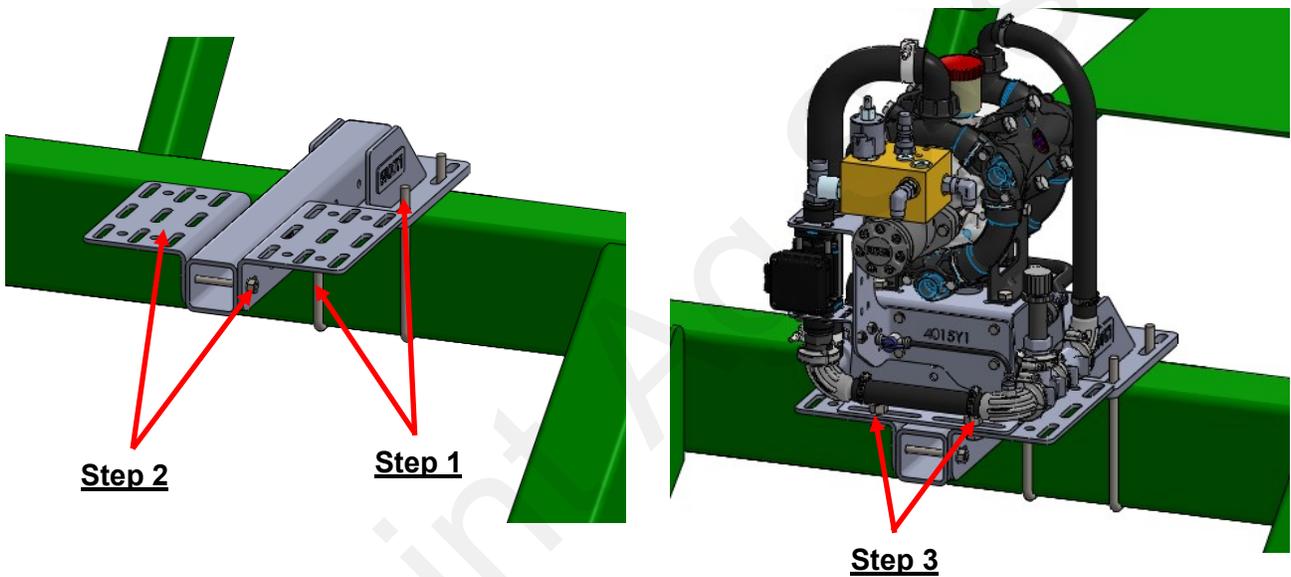

Top of Bar



Bottom of Bar

Vertical Bar

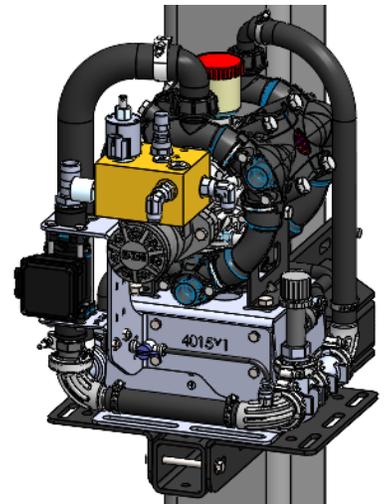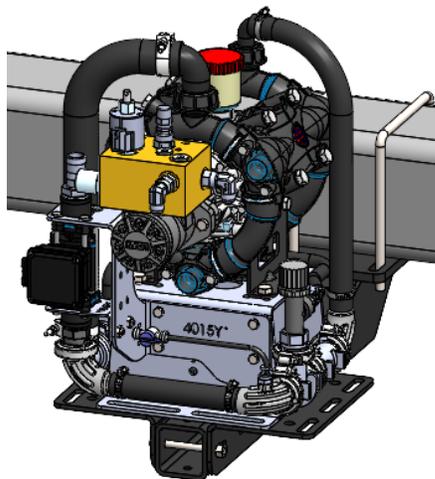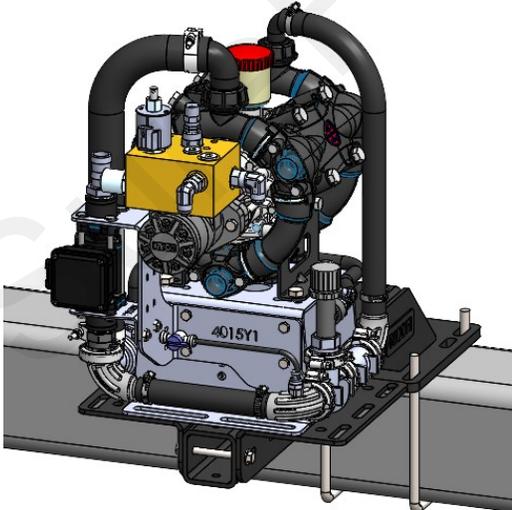





Kit Dimensions and Configurations

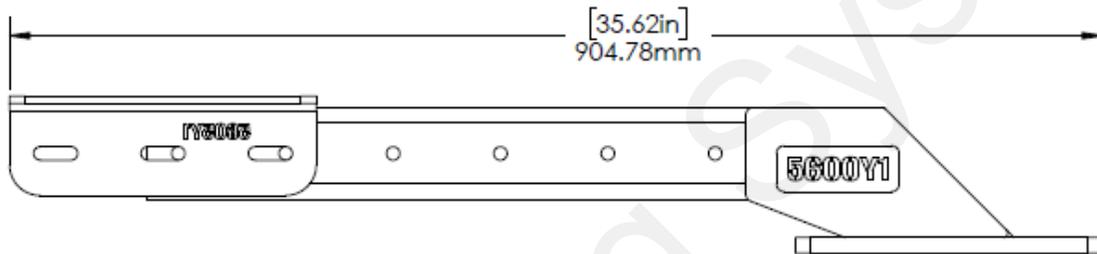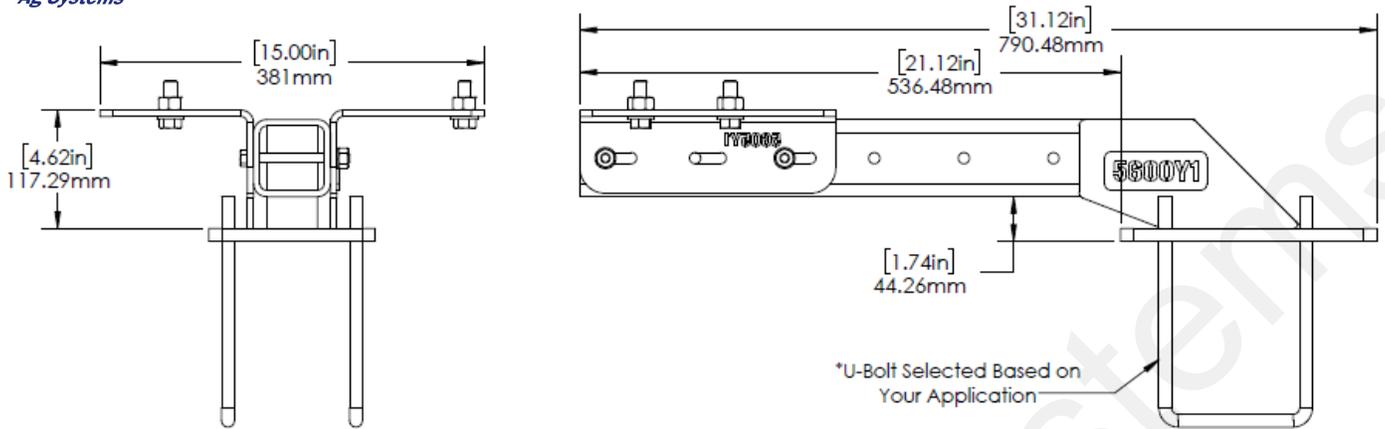

Longest Possible Configuration

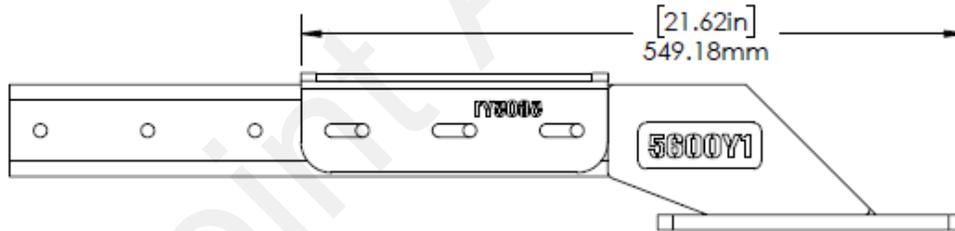

Shortest Possible Configuration

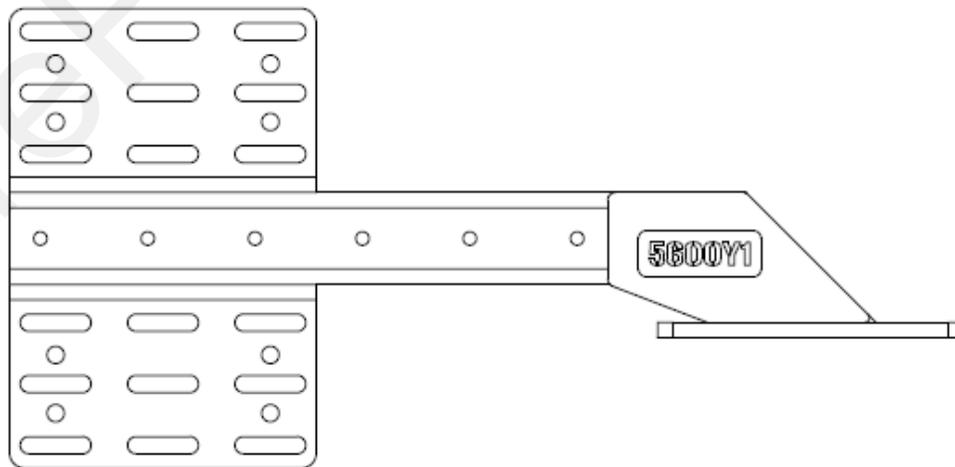

90-Degree Configuration
(Used for mounting on Vertical Bars)