



Instructions for SureBatch Control Box Swap

1. Remove the antenna from the old Control box and put it on the new Control Box.
2. Unplug the Power Cable harness from the front bottom of the Control Box. This is the connector on the left. The connector on the right is a plug which does not need to be removed. (With the screen protector in the up position, push in on the catch with your left thumb and rotate the bottom until the plug is free. See Photo 1)
3. Remove the back cover from the SureBatch case.
4. Using a Phillips screwdriver remove the 4 screws holding the Control Box in place (see Photo 2).
5. Install the new control box with the 4 screws.
6. Plug in the Power Cable harness and rotate the bottom until it locks.
7. Use the new remote with the new Control Box.
8. Send the old Control Box and remote back to SureFire Ag Systems.

Photo 1

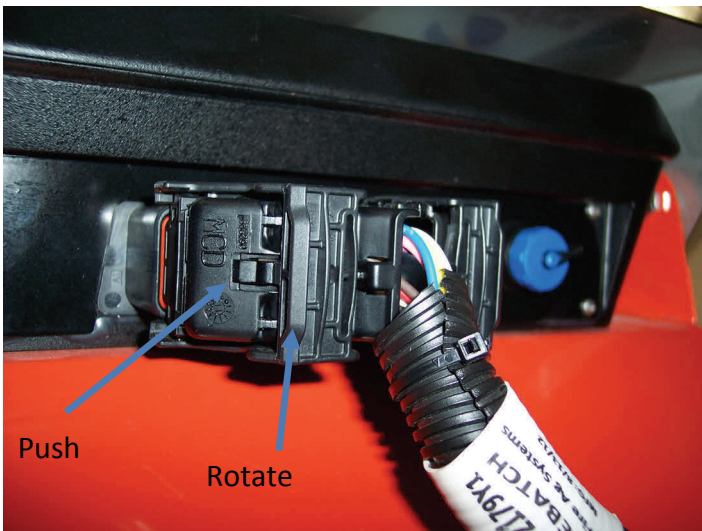


Photo 2

